


КОМПЮТЪРНИ КОМПОНЕНТИ > Дънни Платки

GB B650M K

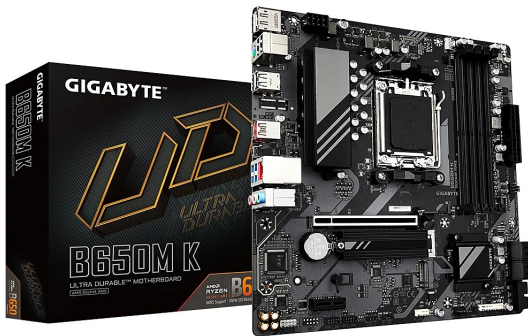

Модел : GB B650M K /AM5

GB B650M K

Graphics: Integrated Graphics Processor: 1 x DisplayPort, supporting a maximum resolution of 3840x2160@144 Hz; * Support for DisplayPort 1.4 version.; 1 x HDMI port, supporting a maximum resolution of 4096x2160@60 Hz; * Support for HDMI 2.1 version and HDCP 2.3.; ** Support native HDMI 2.1 TMDs compatible ports.

CPU's supported: AMD Socket AM5, support for: AMD Ryzen™ 7000 Series Processors

Chipset: AMD B650

Expansion Slots: CPU: 1 x PCI Express x16 slot, supporting PCIe 4.0 and running at x16; Chipset: 1 x PCI Express x1 slot, supporting PCIe 3.0 and running at x1

Storage: CPU: 1 x M.2 connector (Socket 3, M key, type 2580 PCIe 4.0 x4/x2 SSD support); 1 x M.2 connector (Socket 3, M key, type 25110/2280 PCIe 4.0 x4/x2 SSD support); Chipset: 4 x SATA 6Gb/s connectors; RAID 0, RAID 1, and RAID 10 support for NVMe SSD storage devices; RAID 0, RAID 1, and RAID 10 support for SATA storage devices
Memory type: Support for DDR5 6400(OC) / 6200(OC) / 6000(OC) / 5600(OC) / 5200 / 4800 / MT/s memory modules; 4 x DDR5 DIMM sockets supporting up to 192 GB (48 GB single DIMM capacity) of system memory; Dual channel memory architecture; Support for non-ECC Un-buffered DIMM 1Rx8/2Rx8/1Rx16 memory modules; Support for AMD EXtended Profiles for Overclocking (AMD EXPO™) and Extreme Memory Profile (XMP) memory modules

I/O: 1 x DisplayPort; 1 x HDMI port; 4 x USB 2.0/1.1 ports; 1 x PS/2 keyboard/mouse port; 1 x USB 3.2 Gen 2 Type-A port (red); 1 x USB Type-C® port, with USB 3.2 Gen 2 support; 1 x Q-Flash Plus button; 1 x RJ-45 port; 2 x USB 3.2 Gen 1 ports; 3 x audio jacks

Connectors: 1 x 24-pin ATX main power connector; 1 x 8-pin ATX 12V power connector; 1 x CPU fan header; 2 x system fan headers; 1 x addressable LED strip header; 1 x RGB LED strip header; 2 x M.2 Socket 3 connectors; 4 x SATA 6Gb/s connectors; 1 x front panel header; 1 x front panel audio header; 1 x USB Type-C® header, with USB 3.2 Gen 1 support; 1 x USB 3.2 Gen 1 header; 1 x USB 2.0/1.1 header; 1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0 module only); 1 x reset jumper; 1 x Clear CMOS jumper

Audio: Realtek®; Audio CODEC; High Definition Audio;
2/4/5.1/7.1-channel
LAN: Realtek®; 2.5GbE LAN chip (2.5 Gbps/1 Gbps/100
Mbps)
BIOS: 1 x 256 Mbit flash; Use of licensed AMI UEFI BIOS; PnP
1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0
Form Factor: Micro ATX Form Factor; 24.4cm x 24.4cm
OS: Support for Windows 11 64-bit; Support for Windows 10
64-bit
Warranty: 36 Months

Цена : 298.32 лв. с ДДС

Наличност: Този продукт е бил добавен в нашия каталог на Пт 07 юни, 2024