


КОМПЮТЪРНИ КОМПОНЕНТИ > Дънни Платки

## GB H610M S2H /LGA1700

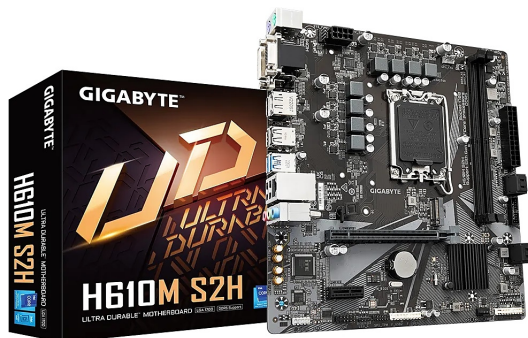

Модел : GB H610M S2H /LGA1700

GB H610M S2H /LGA1700

Graphics: Integrated Graphics Processor-Intel®; HD Graphics support: 1 x D-Sub port, supporting a maximum resolution of 1920x1200@60 Hz; 1 x DVI-D port, supporting a maximum resolution of 1920x1200@60 Hz; \* The DVI-D port does not support D-Sub connection by adapter.; 1 x HDMI port, supporting a maximum resolution of 4096x2160@60 Hz; \* Support for HDMI 2.0 version and HDCP 2.3.; 1 x DisplayPort, supporting a maximum resolution of 4096x2304@60 Hz; \* Support for DisplayPort 1.2 version and HDCP 2.3; (Graphics specifications may vary depending on CPU support.); Support for up to 3 displays at the same time

CPU's supported: LGA1700 socket: Support for 13th Generation Intel® Core™ Processors and 12th Generation Intel® Core™, Pentium® Gold and Celeron® Processors\*; L3 cache varies with CPU  
Chipset: Intel® H610 Express Chipset

Expansion Slots: CPU: 1 x PCI Express x16 slot, supporting PCIe 4.0 and running at x16; Chipset: 1 x PCI Express x1 slot, supporting PCIe 3.0 and running at x1

Storage: Chipset: 1 x M.2 connector (Socket 3, M key, type 2280/2260 PCIe 3.0 x4/x2 SSD support); 4 x SATA 6Gb/s connectors

Memory type: 13th Generation Intel® Core™ i9/i7 processors: Support for DDR5 5600/5200/4800/4400 MT/s memory modules; 13th Generation Intel® Core™ i5/i3 and 12th Generation Intel® Core™, Pentium® Gold and Celeron® Processors: Support for DDR5 4800/4400 MT/s memory modules; 2 x DDR DIMM sockets supporting up to 64 GB (32 GB single DIMM capacity) of system memory; Dual channel memory architecture; Support for ECC Un-buffered DIMM 1Rx8/2Rx8 memory modules (operate in non-ECC mode); Support for non-ECC Un-buffered DIMM 1Rx8/2Rx8/1Rx16 memory modules; support for Extreme Memory Profile (XMP) memory modules

I/O: 1 x PS/2 keyboard port; 1 x PS/2 mouse port; 1 x D-Sub port; 1 x DVI-D port; 1 x DisplayPort; 1 x HDMI port; 2 x USB 3.2 Gen 1 ports; 4 x USB 2.0/1.1 ports; 1 x RJ-45 port; 3 x audio jacks

Connectors: 1 x 24-pin ATX main power connector; 1 x 8-pin

ATX 12V power connector; 1 x CPU fan header; 2 x system fan headers; 1 x M.2 Socket 3 connector; 4 x SATA 6Gb/s connectors; 1 x RGB LED strip header; 1 x front panel header; 1 x front panel audio header; 1 x USB 3.2 Gen 1 header; 2 x USB 2.0/1.1 headers; 1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0 module only); 1 x serial port header; 1 x Clear CMOS jumper  
Audio: Realtek®; Audio CODEC; High Definition Audio; 2/4/5.1/7.1-channel  
LAN: Realtek®; GbE LAN chip (1 Gbps/100 Mbps)  
BIOS: 1 x 128 Mbit flash; Use of licensed AMI UEFI BIOS; PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0  
Form Factor: Micro ATX Form Factor; 23.0cm x 21.5cm  
OS: Support for Windows 11 64-bit; Support for Windows 10 64-bit  
Warranty: 36 Months

Цена : 191.12 лв. с ДДС

Наличност: Този продукт е бил добавен в нашия каталог на Пт 07 юни, 2024