


КОМПЮТЪРНИ КОМПОНЕНТИ > Дънни Платки

GB B650M S2H /AM5

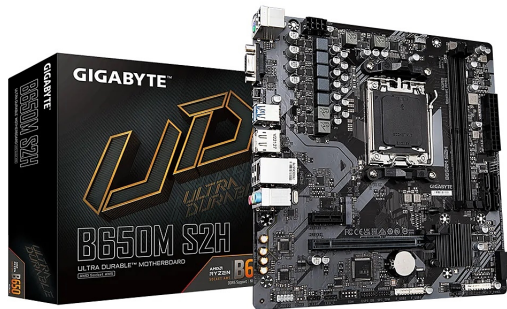

Модел : GB B650M S2H /AM5

GB B650M S2H /AM5

CPU's supported: □ AMD Socket AM5, support for: AMD Ryzen™; 7000 Series Processors

Memory type: Support for DDR5 6400(OC) / 6200(OC) / 6000(OC) / 5600(OC) / 5200 / 4800 / 4400 MT/s memory modules; 2 x DDR5 DIMM sockets supporting up to 96 GB (48 GB single DIMM capacity) of system memory; Dual channel memory architecture; Support for non-ECC Un-buffered DIMM 1Rx8/2Rx8/1Rx16 memory modules; Support for AMD EXPO™ (AMD EXPO™) and Extreme Memory Profile (XMP) memory modules; (The CPU and memory configuration may affect the supported memory types, data rate (speed), and number of DRAM modules, please refer to "Memory Support List" on GIGABYTE's website for more information.)

Chipset: AMD B650

Graphics: Integrated Graphics Processor: - 1 x D-Sub port, supporting a maximum resolution of 1920x1200@60 Hz; - 1 x DisplayPort, supporting a maximum resolution of 3840x2160@144 Hz; * Support for DisplayPort 1.4 version.; - 1 x HDMI port, supporting a maximum resolution of 4096x2160@60 Hz; * Support for HDMI 2.1 version and HDCP 2.3.; ** Support for native HDMI 2.1 TMDS compatible ports.; (Graphics specifications may vary depending on CPU support.); Support for up to 3 displays at the same time

Expansion Slots: CPU: - 1 x PCI Express x16 slot, supporting PCIe 4.0 and running at x16; Chipset: - 1 x PCI Express x1 slot, supporting PCIe 3.0 and running at x1

Storage: CPU: - 1 x M.2 connector (Socket 3, M key, type 2580 PCIe 4.0 x4/x2 SSD support); Chipset: - 4 x SATA 6Gb/s connectors; RAID 0, RAID 1, and RAID 10 support for NVMe SSD storage devices; RAID 0, RAID 1, and RAID 10 support for SATA storage devices

I/O: 4 x USB 2.0/1.1 ports; 1 x PS/2 keyboard/mouse port; 1 x D-Sub port; 1 x Q-Flash Plus button; 2 x USB 3.2 Gen 1 ports; 1 x DisplayPort; 1 x HDMI port; 1 x RJ-45 port; 3 x audio jacks

Connectors: 1 x 24-pin ATX main power connector; 1 x 8-pin ATX 12V power connector; 1 x CPU fan header; 2 x system fan headers; 1 x addressable LED strip header; 1 x RGB LED strip header; 1 x M.2 Socket 3 connector; 4 x SATA 6Gb/s connectors; 1 x front panel header; 1 x front panel audio

header; 1 x USB 3.2 Gen 1 header; 2 x USB 2.0/1.1 headers;
1 x Trusted Platform Module header (For the GC-TPM2.0
SPI/GC-TPM2.0 SPI 2.0 / GC-TPM2.0 SPI V2 module only); 1 x
Clear CMOS jumper
Audio: Realtek®; Audio CODEC; High Definition Audio;
2/4/5.1/7.1-channel
LAN: Realtek®; GbE LAN chip (1 Gbps/100 Mbps/10
Mbps)
BIOS: 1 x 256 Mbit flash; Use of licensed AMI UEFI BIOS; PnP
1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0
Form Factor: Micro ATX Form Factor; 23.0cm x 22.5cm
OS: Support for Windows 11 64-bit; Support for Windows 10
64-bit
Warranty: 36 Months

Цена : 209.57 лв. с ДДС

Наличност: Този продукт е бил добавен в нашия каталог на Сб 14 декември, 2024