


КОМПЮТЪРНИ КОМПОНЕНТИ > Дънни Платки

## GB H610M H V3 DDR4 /LGA1700

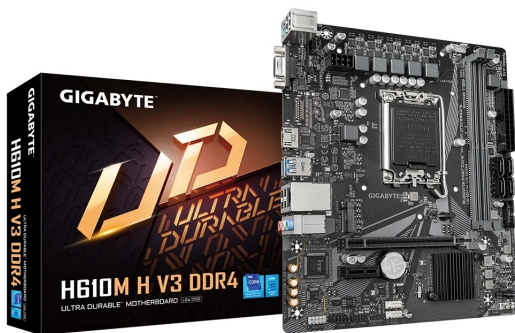

Модел : GB H610M H V3 DDR4 /LGA1700

GB H610M H V3 DDR4 /LGA1700

CPU's supported: LGA1700 socket: Support for the 14th, 13th, and 12th Generation Intel®; Core™; Pentium®; Gold and Celeron®; Processors; L3 cache varies with CPU

Memory type: Support for DDR4

3200/3000/2933/2666/2400/2133 MT/s memory modules; 2 x DDR4 DIMM sockets supporting up to 64 GB (32 GB single DIMM capacity) of system memory; Dual channel memory architecture; Support for ECC Un-buffered DIMM 1Rx8/2Rx8 memory modules (operate in non-ECC mode); Support for non-ECC Un-buffered DIMM 1Rx8/2Rx8/1Rx16 memory modules; Support for Extreme Memory Profile (XMP) memory modules; (The CPU and memory configuration may affect the supported memory types, data rate (speed), and number of DRAM modules, please refer to "Memory Support List" on GIGABYTE's website for more information.)

Graphics: Integrated Graphics Processor-Intel®; HD Graphics support: - 1 x D-Sub port, supporting a maximum resolution of 1920x1200@60 Hz; - 1 x HDMI port, supporting a maximum resolution of 4096x2160@60 Hz; \* Support for HDMI 2.1 version and HDCP 2.3.; \*\* Support native HDMI 2.1 TMDS compatible ports.

Expansion Slots: CPU: - 1 x PCI Express x16 slot, supporting PCIe 4.0 and running at x16; Chipset: - 1 x PCI Express x1 slot, supporting PCIe 3.0 and running at x1

Storage: Chipset: - 1 x M.2 connector (Socket 3, M key, type 2280/2260 PCIe 3.0 x4/x2 SSD support); - 4 x SATA 6Gb/s connectors

I/O: 1 x PS/2 keyboard/mouse port; 1 x D-Sub port; 1 x HDMI port; 2 x USB 3.2 Gen 1 ports; 4 x USB 2.0/1.1 ports; 1 x RJ-45 port; 3 x audio jacks

Connectors: 1 x 24-pin ATX main power connector; 1 x 8-pin ATX 12V power connector; 1 x CPU fan header; 2 x system fan headers; 1 x M.2 Socket 3 connector; 4 x SATA 6Gb/s connectors; 1 x RGB LED strip header; 1 x front panel header; 1 x front panel audio header; 1 x speaker header; 1 x USB 3.2 Gen 1 header; 2 x USB 2.0/1.1 headers; 1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0 / GC-TPM2.0 SPI V2 module only); 1 x serial port header; 1 x Clear CMOS jumper; 1 x chassis intrusion header



Audio: Realtek®; Audio CODEC; High Definition Audio;  
2/4/5.1/7.1-channel  
LAN: Realtek®; GbE LAN chip (1 Gbps/100 Gbps/10 Mbps)  
BIOS: 1 x 128 Mbit flash; Use of licensed AMI UEFI BIOS; PnP  
1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0  
Form Factor: Micro ATX Form Factor; 22.3cm x 19.3cm  
OS: Support for Windows 11 64-bit; Support for Windows 10  
64-bit  
Warranty: 36 Months

Цена : 151.42 лв. с ДДС

*Наличност: Този продукт е бил добавен в нашия каталог на Пт 10 май, 2024*