


КОМПЮТЪРНИ КОМПОНЕНТИ > Дънни Платки

## GB B760M H DDR4

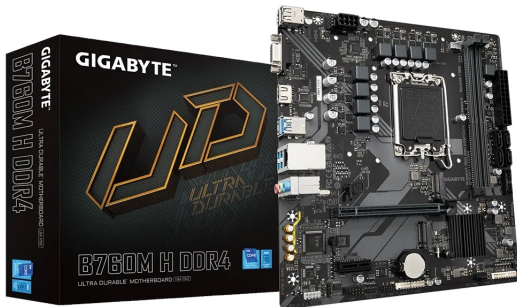

Модел : GB B760M H DDR4 / LGA1700

GB B760M H DDR4

CPU's supported: LGA1700 socket: Support for the 14th, 13th, and 12th Generation Intel®; Core™; Pentium®; Gold and Celeron®; Processors; L3 cache varies with CPU

Memory type: Support for DDR4

3200/3000/2933/2666/2400/2133 MT/s memory modules; 2 x DDR4 DIMM sockets supporting up to 64GB (32 GB single DIMM capacity) of system memory; Dual channel memory architecture; Support for ECC Un-buffered DIMM 1Rx8/2Rx8 memory modules (operate in non-ECC mode); Support for non-ECC Un-buffered DIMM 1Rx8/2Rx8/1Rx16 memory modules; Support for Extreme Memory Profile (XMP) memory modules

Chipset: Intel®; B760 Express Chipset

Graphics: Integrated Graphics Processor-Intel®; HD Graphics support: - 1 x D-Sub port, supporting a maximum resolution of 1920x1200@60 Hz; - 1 x HDMI port, supporting a maximum resolution of 4096x2160@60 Hz; \* Support for HDMI 2.1 version and HDCP 2.3.; \*\* Support native HDMI 2.1 TMDS compatible ports.

Expansion Slots: CPU: - 1 x PCI Express x16 slot, supporting PCIe 4.0 and running at x16; \* The PCIEX16 slot can only support a graphics card or an NVMe SSD.; Chipset: - 1 x PCI Express x1 slot, supporting PCIe 3.0 and running at x1

Storage: CPU: - 1 x M.2 connector (Socket 3, M key, type 2280 PCIe 4.0 x4/x2 SSD support) (M2A\_CPU); Chipset: - 1 x M.2 connector (Socket 3, M key, type 2280 PCIe 4.0 x4/x2 SSD support) (M2P\_SB); - 4 x SATA 6Gb/s connectors; RAID 0, RAID 1, RAID 5, and RAID 10 support for SATA storage devices

I/O: 2 x USB 2.0/1.1 ports; 1 x D-Sub port; 1 x HDMI port; 4 x USB 3.2 Gen 1 ports; 1 x RJ-45 port; 3 x audio jacks

Connectors: 1 x 24-pin ATX main power connector; 1 x 8-pin ATX 12V power connector; 1 x CPU fan header; 2 x system fan headers; 1 x RGB LED strip header; 2 x M.2 Socket 3 connectors; 4 x SATA 6Gb/s connectors; 1 x front panel header; 1 x front panel audio header; 1 x S/PDIF Out header; 1 x USB 3.2 Gen 1 header; 2 x USB 2.0/1.1 headers; 1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0 module only); 1 x serial port header; 1 x Clear CMOS jumper



Audio: Realtek®; Audio CODEC; High Definition Audio;  
2/4/5.1/7.1-channel; \* You can change the functionality of an  
audio jack using the audio software. To configure  
7.1-channel audio, access the audio software for audio  
settings. Support for S/PDIF Out  
LAN: Realtek®; GbE LAN chip (1 Gbps/100 Mbps)  
BIOS: 1 x 128 Mbit flash; Use of licensed AMI UEFI BIOS; PnP  
1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0  
Form Factor: Micro ATX Form Factor; 23.0cm x 21.5cm  
OS: Support for Windows 11 64-bit; Support for Windows 10  
64-bit  
Warranty: 36 Months

Цена : 199.63 лв. с ДДС

*Наличност: Този продукт е бил добавен в нашия каталог на Пт 10 май, 2024*