


КОМПЮТЪРНИ КОМПОНЕНТИ > Дънни Платки

GB B650E A ELITE X ICE

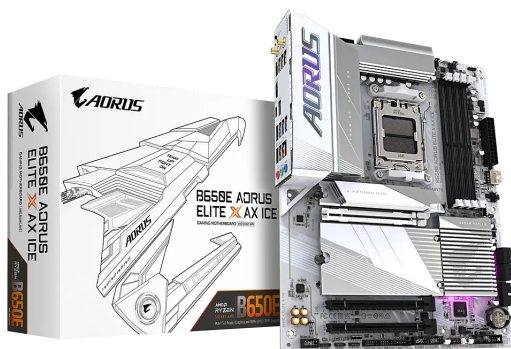

Модел : GB B650E AORUS ELITE X AX ICE

GB B650E A ELITE X ICE

Memory type: Support for DDR5 8000(OC)/ 7800(OC)/ 7600(OC)/ 7200(OC)/ 7000(OC)/ 6800(OC)/ 6666(OC)/ 6600(OC)/ 6400(OC)/ 6200(OC)/ 6000(OC)/ 5600(OC)/ 5200/4800/4400 MT/s memory modules; 4 x DDR5 DIMM sockets supporting up to 192 GB (48 GB single DIMM capacity) of system memory; Dual channel memory architecture; Support for non-ECC Un-buffered DIMM 1Rx8/2Rx8/1Rx16 memory modules; Support for AMD EXtended Profiles for Overclocking (AMD EXPO™) and Extreme Memory Profile (XMP) memory modules

CPU's supported: AMD Socket AM5, support for: AMD Ryzen™ 7000 Series Processors; AMD Ryzen™ 8000 Series Processors

Chipset: AMD B650

Graphics: Integrated Graphics Processor with AMD Radeon™ Graphics support: - 1 x HDMI port, supporting a maximum resolution of 4096x2160@60 Hz; * Support for HDMI 2.1 version and HDCP 2.3.; ** Support for native HDMI 2.1 TMDS compatible ports; - 1 x HDMI port, supporting a maximum resolution of 1920x1080@30 Hz; * Support for HDMI 1.4 version; - 1 x USB Type-C® port, supporting USB 3.2 Gen 2 and DisplayPort video outputs and a maximum resolution of 3840x2160@144 Hz

Expansion Slots: 1 x PCI Express x16 slot (PCIEX16), integrated in the CPU: AMD Ryzen™ 7000 Series Processors support PCIe 5.0 x16 mode; AMD Ryzen™ 8000 Series-Phoenix 1 Processors support PCIe 4.0 x8 mode; AMD Ryzen™ 8000 Series-Phoenix 2 Processors support PCIe 4.0 x4 mode; * The PCIEX16 slot can only support a graphics card or an NVMe SSD. If only one graphics card is to be installed, be sure to install it in the PCIEX16 slot.; Chipset: - 2 x PCI Express x16 slot, , supporting PCIe 3.0 and running at x1 (PCIEX1_1/2)

Storage: 1 x M.2 connector (M2A_CPU), integrated in the CPU, supporting Socket 3, M key, type 25110/2580 SSDs: AMD Ryzen™ 7000 Series Processors support PCIe 5.0 x4/x2 SSDs; AMD Ryzen™ 8000 Series-Phoenix 1/Phoenix 2 Processors support PCIe 4.0 x4/x2 SSDs; 1 x M.2 connector (M2B_CPU), integrated in the CPU, supporting Socket 3, M key, type 22110/2280 SSDs: AMD Ryzen™ 7000 Series Processors support PCIe 4.0 x4/x2 SSDs; AMD Ryzen™ 8000

Series-Phoenix 1 Processors support PCIe 4.0 x4/x2 SSDs; AMD Ryzen™ 8000 Series-Phoenix 2 Processors support PCIe 4.0 x2 SSDs; 1 x M.2 connector (M2C_SB), integrated in the Chipset, supporting Socket 3, M key, type 22110/2280 PCIe 4.0 x4/x2 SSDs; 4 x SATA 6Gb/s connectors; RAID 0, RAID 1, and RAID 10 support for NVMe SSD storage devices; RAID 0, RAID 1, and RAID 10 support for SATA storage devices
I/O: 1 x Q-Flash Plus button; 2 x SMA antenna connectors (2T2R); 1 x HDMI port; 1 x USB Type-C® port, with USB 3.2 Gen 2 support; 2 x USB 3.2 Gen 2 Type-A ports (red); 5 x USB 3.2 Gen 1 ports; 4 x USB 2.0/1.1 ports; 1 x RJ-45 port; 3 x audio jacks
Connectors: 1 x 24-pin ATX main power connector; 1 x 8-pin ATX 12V power connector; 1 x 4-pin ATX 12V power connector; 1 x CPU fan header; 1 x CPU fan/water cooling pump header; 3 x system fan headers; 1 x system fan/water cooling pump header; 3 x addressable RGB Gen2 LED strip headers; 1 x RGB LED strip header; 3 x M.2 Socket 3 connectors; 4 x SATA 6Gb/s connectors; 1 x front panel header; 1 x front panel audio header; 1 x USB Type-C® header, with USB 3.2 Gen 2x2 support; 1 x USB 3.2 Gen 1 header; 2 x USB 2.0/1.1 headers; 1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0/GC-TPM2.0 SPI V2 module only); 1 x HDMI port*; * Only available with the AMD Radeon™ Graphics Processors.; 1 x reset button; 1 x reset jumper; 1 x Clear CMOS jumper
Audio: Realtek® Audio CODEC; High Definition Audio; 2/4/5.1/7.1-channel
LAN: Realtek® 2.5GbE LAN chip (2.5 Gbps/1 Gbps/100 Mbps)
BIOS: 1 x 256 Mbit flash; Use of licensed AMI UEFI BIOS; PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0
Form Factor: ATX Form Factor; 30.5cm x 24.4cm
OS: Support for Windows 11 64-bit; Support for Windows 10 64-bit
Other: Realtek® Wi-Fi 6E RTL8852CE; - WIFI a, b, g, n, ac, ax, supporting 2.4/5/6 GHz carrier frequency bands; - BLUETOOTH 5.3; - Support for 11ax 160MHz wireless standard
Warranty: 36 Months

Цена : 536.72 лв. с ДДС

Наличност: Този продукт е бил добавен в нашия каталог на Пт 22 ноември, 2024