


МРЕЖОВА ТЕХНИКА > СУИЧОВЕ

## D-Link 28-Port Gigabit PoE+ Smart Switch including 4 SFP Ports

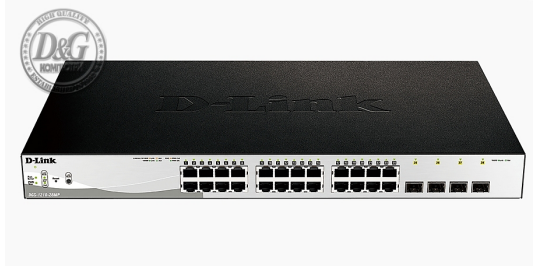

Модел : DGS-1210-28MP

D-Link 28-Port Gigabit PoE+ Smart Switch including 4 SFP Ports

Суич, тип: Fixed Port

Общ брой портове: 28

Основни портове, тип: 24x10/100/1000Base-T

Power Over Ethernet (PoE): Ports 1 to 24 compliant with 802.3at; PoE Power Budget: 370 W

Uplink портове: 4xSFP

Свободни (10GB) слотове: No

Управление: Web-based GUI, D-Link Network Assistant

Utility, Compact CLI, Telnet Server, TFTP Client, Configurable MDI/MDIX, SNMP v1/v2c/v3, SNMP Trap, Backup/Upgrade firmware, Smart Wizard, Upload/Download Configuration file, RMONv1, Trusted Host, ICMP v6, SNTP

Stackable: No

Fans: Low speed: 47.94 dBA, High speed: 52.41 dBA

Захранване: Internal Universal Power Supply: 100 - 240

VAC, 50/60 Hz

Routing: Layer 3 Lite

Памет (Flash, RAM): Flash: 32 MB, CPU: 256 MB DDR3

Капацитет за маршрутизиране/превключване, Gbps: 56 Gbps

Пропускателна способност, Mpps: 41.7 Mpps

MAC адреси: 16000 MAC address table size

VLAN (брой, стандарти): IEEE 802.1Q; VLAN Group: max.

256 static VLAN groups, max. 4094 VIDs; Asymmetric VLAN;

Auto Voice VLAN: max. 10 user defined OUI, max. 8 default

OUI; Auto Surveillance VLAN

QoS: 802.1p Quality of Service; 8 queues per port; Queue

Handling - Strict, Weighted Round Robin (WRR); Bandwidth

Control - Port-based (Ingress/Egress, min granularity

10/100/1000 is 64 Kbps); QoS based on: 802.1p Priority

Queues, DSCP, ToS, IPv6, TCP/UDP port

L2 мрежови стандарти: IEEE 802.3, IEEE 802.3u, IEEE

802.3ab, IEEE 802.3ad, IEEE 802.3at, IEEE 802.3az, IEEE

802.3x, IEEE 802.3z, IEEE 802.1D, IEEE 802.1w, IEEE 802.1s,

IEEE 802.1Q, IEEE 802.1p, IEEE 802.1X

L3 мрежови стандарти: Static Routing: 64 IPv4 Static

Route Entries, 64 IPv4 Static Route Entries

IPv6 functionality: IPv6 Ready: Fully IPv6 compatible and

ready for enterprise deployment, giving you a head start on

the next Internet standards evolution

Сигурност: Broadcast/Multicast/Unicast Storm Control,  
D-Link Safeguard Engine, DHCP Server Screening,  
IP-MAC-Port Binding (Smart Binding), 802.1X Port-based  
Access Control, ARP Spoofing Prevention, Traffic  
Segmentation, SSH v2, SSL, Port Security  
Размери (Ш, Д, В), mm: 440 x 250 x 44  
Опция за монтаж: Rackmount

Цена : 1225.36 лв. с ДДС

*Наличност: Този продукт е бил добавен в нашия каталог на Пн 24 юни, 2024*