


КОМПЮТЪРНИ КОМПОНЕНТИ > Дънни Платки

## GB B650 A ELITE AX ICE

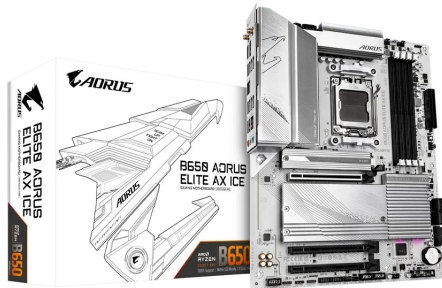

Модел : GB B650 A ELITE AX ICE /AM5

GB B650 A ELITE AX ICE

CPU's supported: □ AMD Socket AM5, support for: AMD Ryzen™; 7000/ Ryzen™; 8000 Series Processors  
Memory type: Support for DDR5

8000(OC)/7800(OC)/7600(OC)/7200(OC)/7000(OC)/6800(OC)  
/6666(OC)/6600(OC)/6400(OC)/6200(OC)/

6000(OC)/5600(OC)/5200/4800/4400 MT/s memory modules; 4 x DDR5 DIMM sockets supporting up to 192 GB (48 GB single DIMM capacity) of system memory; Dual channel memory architecture; Support for non-ECC Un-buffered DIMM 1Rx8/2Rx8/1Rx16 memory modules; Support for AMD EXTended Profiles for Overclocking (AMD EXPO™) and Extreme Memory Profile (XMP) memory module

Chipset: AMD B650

Graphics: Integrated Graphics Processor with AMD Radeon™; Graphics support: - 1 x DisplayPort, supporting a maximum resolution of 3840x2160@144 Hz; \* Support for DisplayPort 1.4 version and HDR.; - 1 x HDMI port, supporting a maximum resolution of 4096x2160@60 Hz

Expansion Slots: 1 x PCI Express x16 slot (PCIEX16), integrated in the CPU: - AMD Ryzen™; 7000 Series Processors support PCIe 4.0 x16 mode; - AMD Ryzen™; 8000 Series-Phoenix 1 Processors support PCIe 4.0 x8 mode; - AMD Ryzen™; 8000 Series-Phoenix 2 Processors support PCIe 4.0 x4 mode; \* The PCIEX16 slot can only support a graphics card or an NVMe SSD. If only one graphics card is to be installed, be sure to install it in the PCIEX16 slot.; Chipset: - 2 x PCI Express x16 slots, supporting PCIe 3.0 and running at x1 (PCIEX1\_1/2)

Storage: 1 x M.2 connector (M2A\_CPU), integrated in the CPU, supporting Socket 3, M key, type 25110/2580 SSDs: - AMD Ryzen™; 7000 Series Processors support PCIe 5.0 x4/x2 SSDs; - AMD Ryzen™; 8000 Series-Phoenix 1 Processors support PCIe 4.0 x4/x2 SSDs; - AMD Ryzen™; 8000 Series-Phoenix 2 Processors support PCIe 4.0 x4/x2 SSDs; 1 x M.2 connector (M2B\_CPU), integrated in the CPU, supporting Socket 3, M key, type 25110/2580 SSDs: - AMD Ryzen™; 7000 Series Processors support PCIe 4.0 x4/x2 SSDs; - AMD Ryzen™; 8000 Series-Phoenix 1 Processors support

PCIe 4.0 x4/x2 SSDs; - AMD Ryzen® 8000 Series-Phoenix 2 Processors support PCIe 4.0 x2 SSDs; 1 x M.2 connector (M2C\_SB), integrated in the Chipset, supporting Socket 3, M key, type 25110/2580 PCIe 4.0 x4/x2 SSDs; 4 x SATA 6Gb/s connectors; RAID 0, RAID 1, and RAID 10 support for NVMe SSD storage devices; RAID 0, RAID 1, and RAID 10 support for SATA storage devices  
I/O: 1 x Q-Flash Plus button; 2 x SMA antenna connectors (2T2R); 1 x DisplayPort; 1 x HDMI port; 1 x USB Type-C® port, with USB 3.2 Gen 2 support; 2 x USB 3.2 Gen 2 Type-A ports (red); 5 x USB 3.2 Gen 1 ports; 4 x USB 2.0/1.1 ports; 1 x RJ-45 port; 3 x audio jacks  
Connectors: 1 x 24-pin ATX main power connector; 1 x 8-pin ATX 12V power connector; 1 x 4-pin ATX 12V power connector; 1 x CPU fan header; 1 x CPU fan/water cooling pump header; 3 x system fan headers; 1 x system fan/water cooling pump header; 3 x addressable RGB Gen2 LED strip headers; 1 x RGB LED strip header; 3 x M.2 Socket 3 connectors; 4 x SATA 6Gb/s connectors; 1 x front panel header; 1 x front panel audio header; 1 x USB Type-C® header, with USB 3.2 Gen 2x2 support; 1 x USB 3.2 Gen 1 header; 2 x USB 2.0/1.1 headers; 1 x Trusted Platform Module header (For the GC-TPM2.0 SPI/GC-TPM2.0 SPI 2.0/GC-TPM2.0 SPI V2 module only); 1 x reset button; 1 x reset jumper; 1 x Clear CMOS jumper  
Audio: Realtek® Audio CODEC; High Definition Audio; 2/4/5.1/7.1-channel  
LAN: Realtek® 2.5GbE LAN chip (2.5 Gbps/1 Gbps/100 Mbps)  
BIOS: 1 x 256 Mbit flash; Use of licensed AMI UEFI BIOS; PnP 1.0a, DMI 2.7, WfM 2.0, SM BIOS 2.7, ACPI 5.0  
Form Factor: ATX Form Factor; 30.5cm x 24.4cm  
OS: Support for Windows 11 64-bit; Support for Windows 10 64-bit  
Other: Realtek® Wi-Fi 6E RTL8852CE; - WIFI a, b, g, n, ac, ax, supporting 2.4/5/6 GHz carrier frequency bands; - BLUETOOTH 5.3; - Support for 11ax 160MHz wireless  
Warranty: 36 Months

Цена : 499.63 лв. с ДДС

Наличност: Този продукт е бил добавен в нашия каталог на Пт 10 май, 2024